


ARM



4BAR ARM High class series



- It is used in the windows of aluminum, PVC project pull down, Push out.
- The rust is prevented by using the stainless quality of material of best quality and the deformation of products is minimized.
(The state of initial use is kept for a long time)

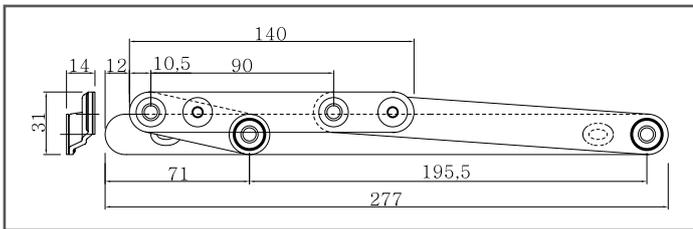


Model	Length(m/m)	Angle	Application (m/m)	Quality of material
DH-501	277	30°	31×14±	SUS-304 Series
DH-701	348	30°	31×14±	SUS-304 Series
DH-901	500	25°	31×14±	SUS-304 Series

*The application to all windows of P/J, P/D by using various PVC saucers is possible

ARM For heavy haul



- It is used in the windows of aluminum, PVC project pull down, Push out.
- The rust is prevented by using the stainless quality of material of best quality and the deformation of products is minimized.
(The state of initial use is kept for a long time)

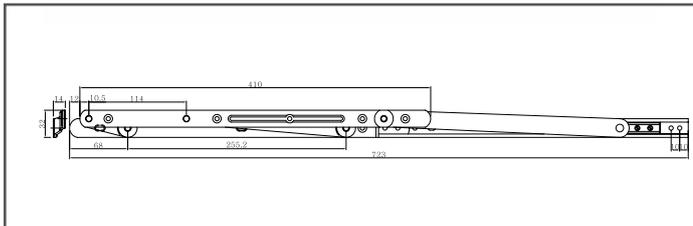


Model	Length (m/m)	Angle	Application (m/m)	Quality of material
NSL-723	723	31°	32×14±	SUS-304 Series
K-378	378	38°	38×14±	Rolled material of SUS-304 Series

ARM For Casement




- It is used in the windows of aluminum, PVC project pull down, Push out.
- The rust is prevented by using the stainless quality of material of best quality and the deformation of products is minimized.
(the state of initial use is kept for a long time)
- hinge and supporting rock are not necessary.

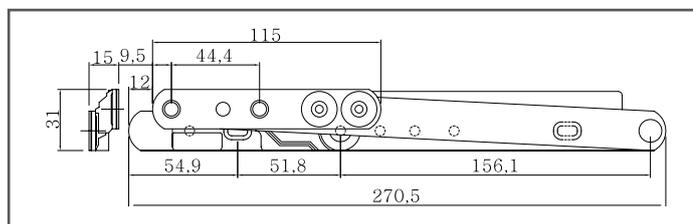

Model	Length (m/m)	Angle	Application (m/m)	Quality of material
CA-270	270	90°	31×15±1	SUS-304 Series
K-283CM	283	80°	38×19±1	Rolled material of SUS-304 Series

ARM Auxiliary spar

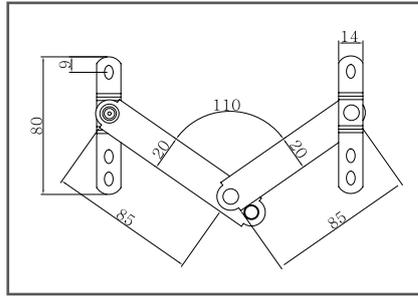


- Exclusive to pull down
- The application varies according to the window form and size

Model	Form	Classification	Application (m/m)
DP-2	V type	Small (150m/m)	14±1
DP-3	V type	Middle (250m/m)	14±1




- Exclusive to pull down
- The application varies according to the window form and size

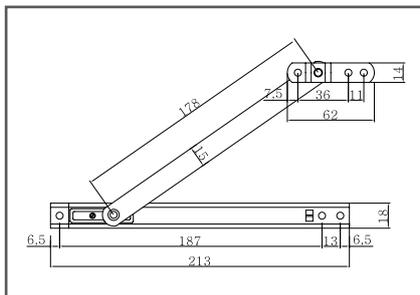

Model	Form	Length	Application (m/m)
NSP-1	1 letter type	213 × 178	Rail 18 × 14±1
NSP-2	1 letter type	269 × 270	Rail 18 × 14±1
NLP-5	1 letter type	201 × 183	Rail 22 × 22
NLP-8	1 letter type	290 × 340	Rail 22 × 22

ARM for Emergency escape (Separation)

* The best products in the emission of smoke and the emergency escape as the windows are completely open and closed using the separation function at time of fire, the emergent situation.

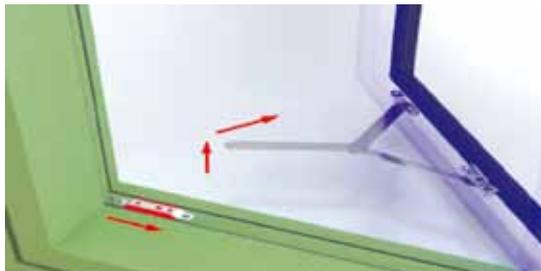

The method of use


It is separated from the bracket as the pin fixed in the dark segment if the red color plastic component is pulled to the direction of arrow.

ARM General type




AN-2 (300m/m) / A-1 (200m/m)

- It is used in the windows of pull down, push out.

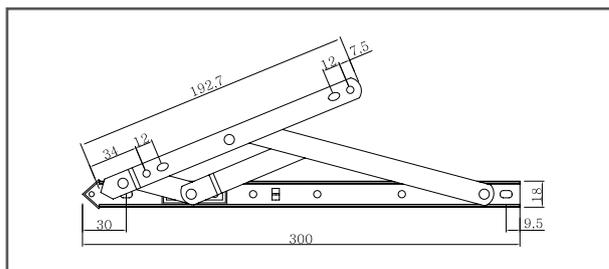

ARM Popular type

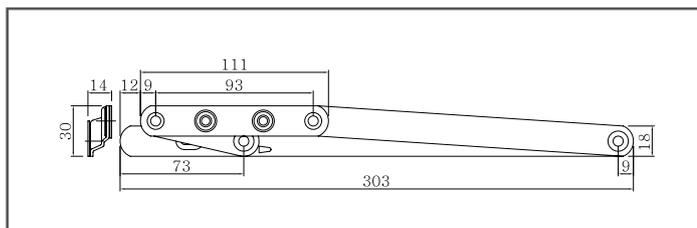

Model	Length(m/m)	quality of material
DH-204B	204	SUS-430 Series
DH-206B	206	SUS-304 Series
DH-303B	303	SUS-430 Series
DH307B	307	SUS-304 Series

ARM Plate



P20022 / P52215 / P63516

- It may be constructed more conveniently and solidly with the use of various plates

Bearing guide



- The deflection of casement windows is lessen or the clearance of top and bottom, left and right of windows are held.